

ST 3

GENERAL DESCRIPTION

The ST 3 features a 3" (75 mm) driver in a rigid, extruded aluminum enclosure with a dedicated omni-directional mounting bracket. Its design has no parallel walls, which helps to eliminate all cabinet resonances. This small loudspeaker delivers consistent coverage with excellent accuracy and projection quality. Its innovative design offers wide horizontal and vertical coverage, reducing off-axis variations.



The visually-distinctive enclosure can be installed either horizontally or in upright position. The curved shape of the cabinet allows surface-mounting close to the walls and facilitates ceiling installation by using an omni-directional bracket. The ST 3 can be employed as a stand-alone unit or can be combined with the unobtrusive CR 10s sub-woofer.

The ST 3 is available in an attractive black/white matte finish, and it is ideal for distributed sound in restaurants, boutiques, small bars, lounge areas and foyers.

FEATURES

- ✓ Compact, high performance
- ✓ Designed to combine with CR 10s
- ✓ Fast, integral clamp
- ✓ Easy to install with minimal wiring
- ✓ Can retrofit into existing venues
- ✓ Controlled with a customised app

SYSTEM APPLICATIONS

- ✓ Restaurants and hotels
- ✓ Museums and A/V spaces
- ✓ Cafes
- ✓ Retail outlets
- ✓ Gyms
- ✓ Homes


SYSTEM SPECIFICATIONS

Type	Ultra compact satellite
Frequency Response (1)	150 Hz-16kHz \pm 3 dB
Drivers	LF: 3" (75 mm) neo driver
Recommended Amplifier Upto	40 Watts
Sensitivity (1 Watt/1 metre)	91 dB
Maximum SPL (9)	104 dB continuous, 110dB Max
Nominal Impedance	8 Ohms
Dispersion	90° conical
Crossover	HPF 125 Hz
Enclosure	Extruded Aluminum
Finish	Powder Coated
Protective Grille	Perforated steel
Connectors	2 x Phoenix
Pin Connections	Input: \pm 1, Link through: \pm 2
Standard Colours	Black / White
Fittings	Rear mounting
Dimensions - Product	(W) 115 mm x (H) 90 mm x (D) 137 mm
Dimensions - Including packing	(W) 290 mm x (H) 150 mm x (D) 193 mm
Horn	NA
Rated Continuous Power AES	20 Watts
Rated Maxium Power/Program Power	40 Watts
Peak Power	80 Watts
Net weight	1 kgs
Shipping Weight	2.5 kgs (Shipped in pairs)

Mid highs measured on axis in full space @ 1 watt/1 meter using band limited pink noise. In the en-deavour to continuously improve the product with design refinements introduced into existing products. Any current CSC product may differ in some respect from its published description. However this will always equal or exceed the original design specifications. Every CSC product is built to the highest standards and tested to ensure that it meets the performance criteria specified.

SAFETY INSTRUCTIONS

- ÿ When flying speakers, appropriate hardware and techniques must be employed for safely suspending the enclosures.
- ÿ Ensure all instructions that appear on specific loudspeaker datasheets are followed.
- ÿ All speaker hardware and flying apparatus must be regularly inspected for any visual or mechanical failure.
- ÿ Leave adequate distance between speakers and the audience. Refer to your local authority for Health and Safety guidance when using loudspeaker systems.
- ÿ The CSC digital controller should only be programmed by a CSC authorized technician. Do not use CSC loudspeaker systems without the correct controller and the program. If a system fails due to incorrect controller use, warranty is void.
- ÿ Protect your speakers and electronics from exposure to humidity, water or rain.
- ÿ CSC loudspeakers and electronics are covered against defects in workmanship or materials for a period of two years from the original date of purchase. The CSC warranty **does not cover** any item which in CSC's opinion has failed due to user abuse, accident, modifications.
- ÿ The defective item will be repaired/replaced with no charge for materials or labour. However the item should be adequately packed and dispatched, pre-paid, to a CSC authorized distributor/service center.

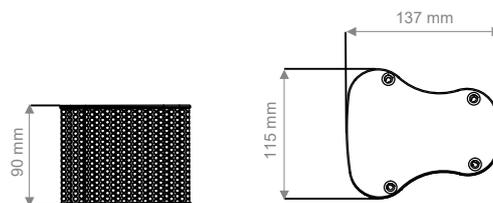

Front View

Top View